

				PERFORMANCE CURVE				PRODUCT BS2060.390		TYPE MT							
DATE 2007-02-04		PROJECT						CURVE NO 53-231-00-0100			ISSUE 6						
POWER FACTOR EFFICIENCY MOTOR DATA		1/1-LOAD		3/4-LOAD		1/2-LOAD		RATED POWER STARTING CURRENT ... RATED CURRENT ...		2.2 kW 26 A 4.5 A		---					
		0.91 78.0 %		0.88 79.0 %		0.80 78.0 %		RATED SPEED TOT.MOM.OF INERTIA ... NO. OF BLADES		2840 rpm 0.0042 kgm2 3		MOTOR # 14-10-2AF		STATOR 34Y		REV 10	
		---		---		---		FREQ. 50 Hz		PHASES 3		VOLTAGE 400 V		POLES 2			
COMMENTS				INLET/OUTLET - / 65 mm		GEARTYPE						RATIO					
				IMP. THROUGHLET ---		---						---					

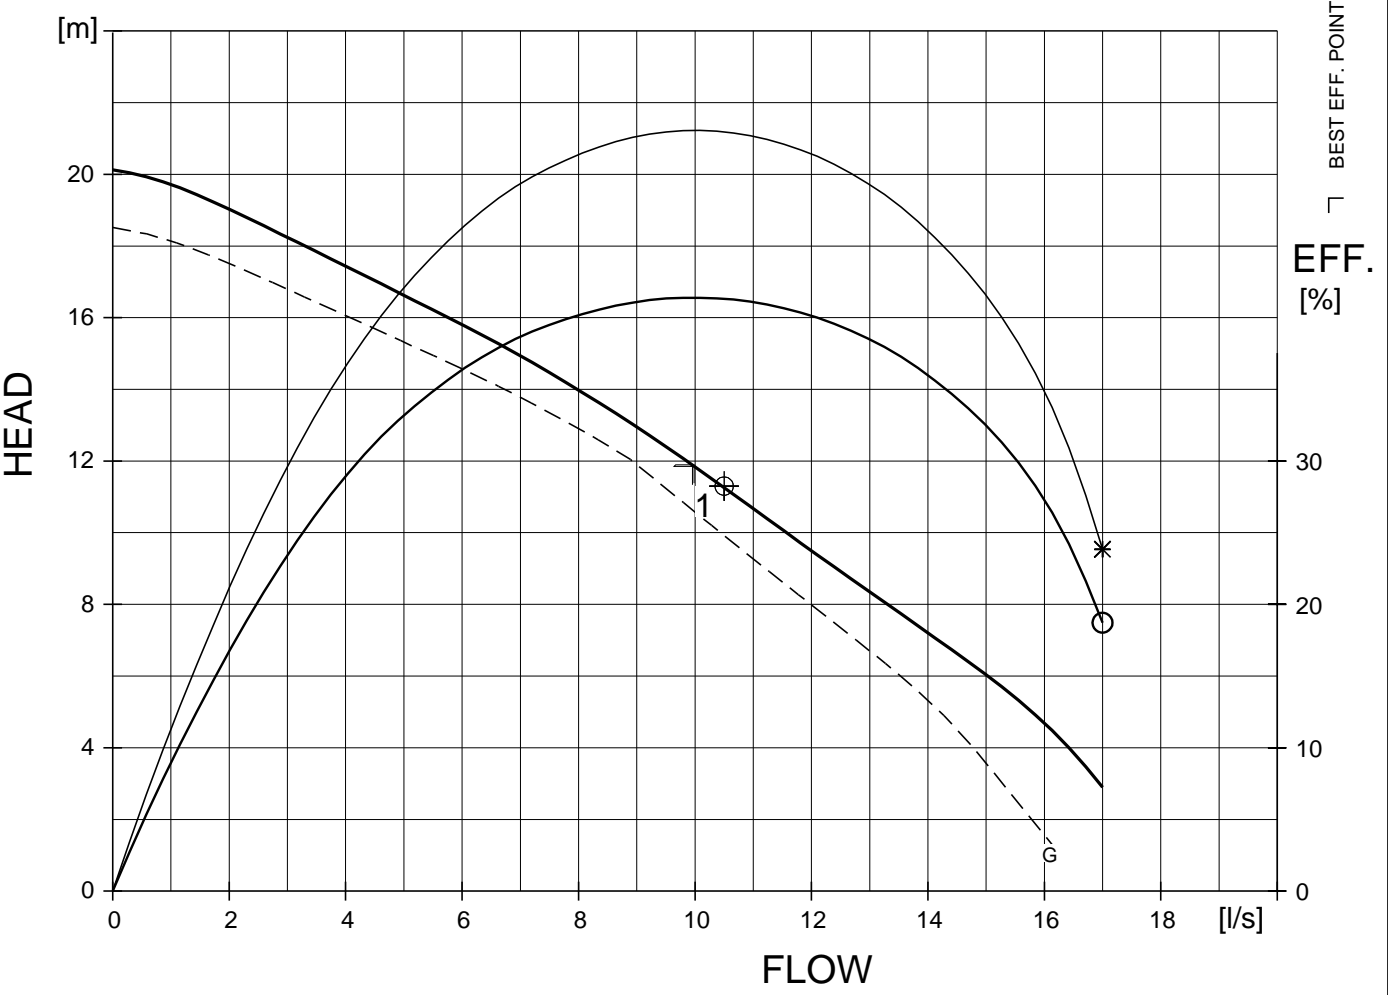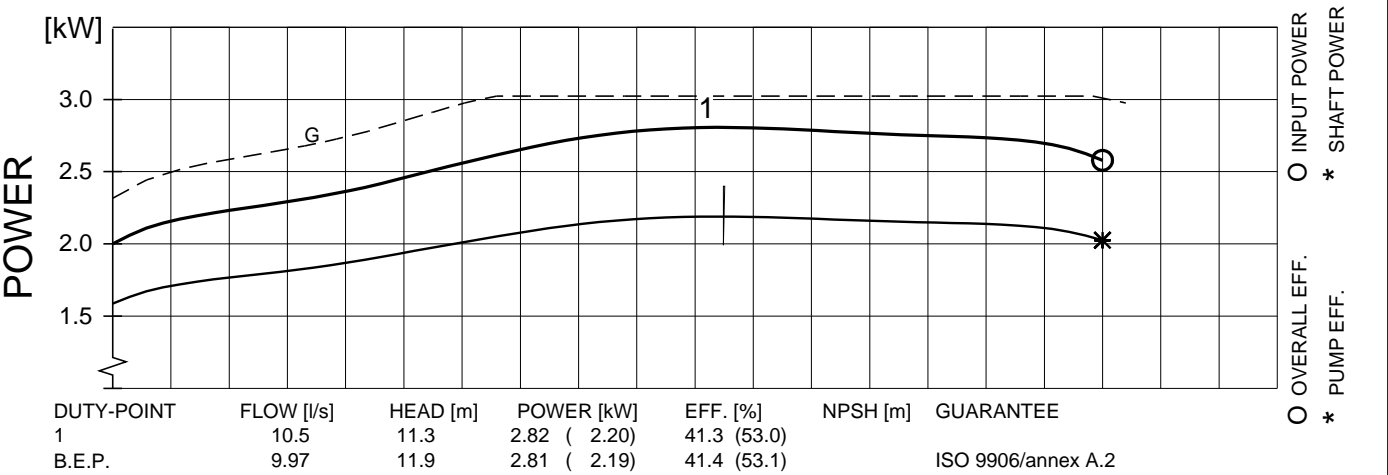

FLYPS2.11 (20010918)

Performance with clear water and ambient temp 40 °C

GUARANTEE BETWEEN LIMITS (G) ACC. TO
ISO 9906/annex A.2